SAMSUNG

YP-55

DIGITAL AUDIO PLAYER

yepp ™

MP3 & WMA Playback
Removable Storage Device
Encoding Function
3D Sound
Upgradable
FM Reception

SRS WOW Surround

MP3 WMA Play back

MP3 Encoding

FM Radio

Contents

Safety Instructions

Read and understand all the instructions to avoid injury to yourself and damage to the equipment.

Do not expose to extreme temperatures (above 95°F or below 23°F). Do not expose to moisture.	Do not apply excessive pressure to the device.	Do not let any foreign matter spill into the device.
Do not place heavy objects on top of the device.	Do not expose to chemicals such as benzene and thinners.	Remove batteries when the device is left unused for a long period of time.
Do not expose to direct sunlight or heat sources.	Do not store in dusty areas.	Do not try to disassemble and repair the device yourself.

Earphones

Follow Traffic Safety Instructions

● Do not use the earphones while driving an automobile or riding a bicycle.
  It's not only dangerous, but also against the law.
● It may cause an accident if you turn up the volume of the earphones while walking down the street, especially crossing at intersections.

Protect your ears

● Do not turn up the volume too high.
  Doctors warn against prolonged exposure to high volume.
● Stop using the device or turn the volume down if you have ringing in your ears.

Ambient operating conditions

● Ambient temperature: 5°C ~ 35°C (41°F ~ 95°F)
  Humidity   : 10 ~ 75%

Environmental Information

● Follow local guidelines for waste disposal when discarding packages, batteries, and old electronic appliances.
● Yepp packages use cardboard, polyethylene etc., and do not use any unnecessary materials.

DIGITAL SOUND yepp′

Removable Storage Device

You can easily copy and paste files to the yepp player using Windows Explorer.

Featuring an Encoding Function

You can make a MP3 file out of an source using the ENC jack on the main unit.
You can also convert an FM radio program into an MP3 file in real time.

Upgradable

You can upgrade the built-in programs when available.

Add functions, CODEC, etc.
Please check the yepp home page (http://www.samsungyepp.com) for upgrades.

MP3 & WMA Playback

MP3 is an MPEG1 Layer3 audio format.
WMA is a Microsoft Windows Media audio format.

FM Reception

Listening to an FM program is made easy with Auto Search and Frequency Memory functions.

Featuring 3D Sound

The 3D feature adds spaciousness to the sound.

DIGITAL SOUND yepp'

Voice Recording Function

You can do a Voice Recording with high quality and use it for a conference.

Sound

You can adjust equalizer manually.

15-Hour Continuous Play

This unit uses one AAA/LR03 alkaline battery. Operation can last up to 15 hours.
Actual playing time may vary according to the type and capacity of the battery.

Components

Earphone	USB Cable	User manual	Installation CD

yepp'

Player	One Battery (1.5V AAA/LR03 type)	Neck Strap	Carrying case	Direct Connect USB Adaptor	Line Cable
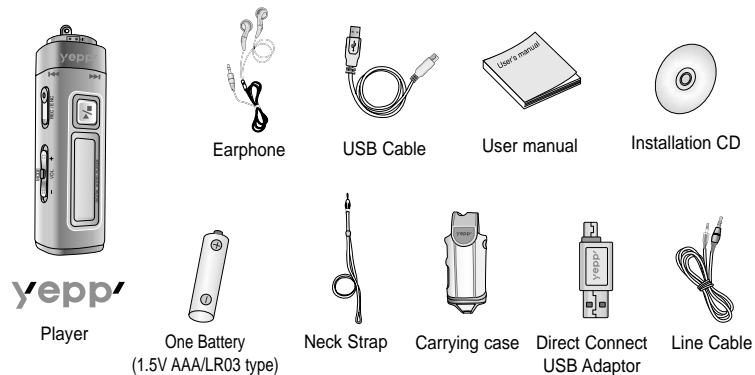
Model	YP-55 H	YP-55 i	YP-55 V
Built-in memory	128MB	192MB	256MB

● The capacity of the useable built-in memory is less than indicated as the internal firmware uses a part of the memory as well.
● Design of accessories is subject to change for improvement without notice.

MENU/Loop Repeating Button

Voice Recording Button

Volume Button

Neck strap Hook

MODE

VOL +

REC / ENC

Microphone

Display

Play/Stop/Pause Button

Move to Track/
Speed Search Lever

DIGITAL AUDIO PLAYER

WOW Button

WOW

YP-55
128 MB

SRS(●)

HOLD ▼

USB Cable
Connection Port

Hold Switch

Battery Cover

ENC Jack

Earphone Jack

ENG

Display

Playtime indicator

Repeat A-B indicator

Equalizer, SRS indicator

Music/Voice/FM indicator

Play mode indicator

NOR 0 0 : 0 1 : 3 0 ᴬ↔ᴮ
♫♪

NOR

Get Original, Black Eyed

001

Remaining Battery
Power indicator

Track Number indicator

Title (track & artist) indicator

Inserting a Battery

1 Slide the cover in the direction
of the arrow to open.

OPEN

OPEN

2 Insert a battery to the right poles + , –
and push-close the cover in the
direction the arrow as indicated.

Note :
● Do not place heavy objects on the cover.

Connecting yepp to PC

ENG

System Requirements.

● Pentium 133MHz or greater
● Windows 98 SE/ME/2000/XP
● 20MB of available hard disk space
● CD-ROM drive
 (double speed or greater)
● USB port (1.1) supported
● VGA graphic

Note :

● Install the operating system in Administrator Account mode for Windows 2000 or XP. Otherwise, installation will not be completed.
● Windows ME, 2000 and XP can recognize the driver without installing the provided program. However, you must install the program in order to format yepp and upgrade firmware.
● If the YP-55 program has not been installed in Windows 98, then it will not communicate with your removable disk. You must install the USB driver file first.

Before connecting yepp to PC, make sure to install USB driver. If "**Add New Hardware Wizard**" appears, press the **[Cancel]** button and install USB driver.

Installing software

1 Insert the Installation CD into CD-ROM drive. The picture shown below appears. Select **[USB Driver Install]**.

Click
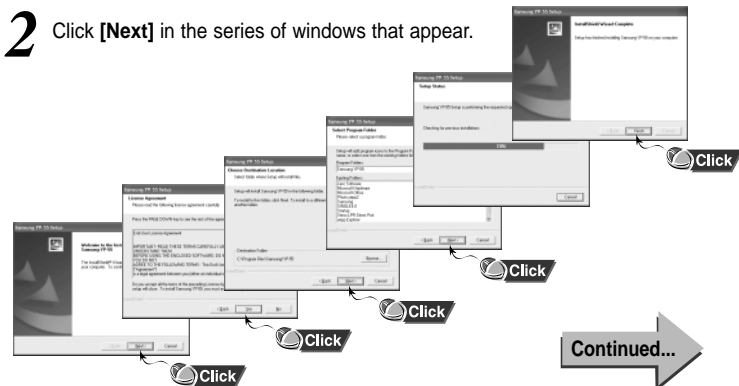
When installation is completed, connect yepp to PC and use it as shown on the next page.

2 Click **[Next]** in the series of windows that appear.

Click
Click
Click
Click
Click

Continued...

12

13

Connecting yepp to PC with USB cable

3 Plug one end of the USB cable into the USB port on the back of the PC.

4 Connect the opposite end of the USB cable to the USB cable port on the bottom of the yepp.
● If you disconnect the USB cable from your PC while implementing a command or initializing during USB driver installation, your PC may not function correctly.
● The yepp will automatically turn on.

5 USB driver is installed with a message saying that it is searching for a new device. You may not see the display screen during installation.
Go to the device manager to check that installation has been successfully completed.

6 Upon installation of the USB driver "**SAMSUNG YP-55**" will appear in the **[System Properties]** → **[Device Manager]**.

USB connect cable
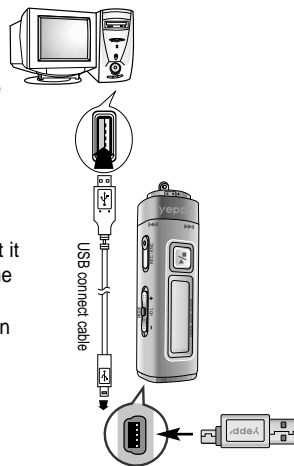
Note :

How to check USB driver
Windows 98:
Control Panel → **System** → **Device Manager** →
Universal Serial Bus controllers/Samsung YP-55 Class
Windows 2000:
Control Panel → **System** → **Hardware** →
Device Manager → **Universal Serial Bus controllers** →
USB Mass Storage Device
Windows XP:
Control Panel → **System** → **Hardware** →
Device Manager → **Universal Serial Bus controllers** →
USB Mass Storage Device

7 When USB driver is not Installed automatically, refer to next page.

Note :
For WinXP, the following window will appear whenever you connect the USB cable to your yepp.

Manual Installation of USB Driver

Go to "Downloading/Uploading files" on page 20 if the USB driver is in place.
Follow these steps if the USB driver is not in place :

1 Check the device manager.
Windows 98,ME:
Control Panel → System → Device Manager
Windows 2000:
**Control Panel → System → Hardware →
Device Manager**
Windows XP:
**Control Panel → System → Hardware →
Device Manager**

2 Check if there is a device listed with
an exclamation point or a question
mark (displayed as unknown device
or USB device).

3 Double click on the device listed with an
exclamation point or a question mark.

Note :
● If you are using Windows 2000 and your version of Windows does not recognize the USB driver
please download and install the latest service pack from windowsupdate.microsoft.com
● The installation method may vary depending on the type of PC or operating system.
Contact your PC dealer or service center for installation information.
● If errors occur continuously when you install the USB driver, reconnect the USB cable
after rebooting your system.

4 After selecting the driver, click on **[Update Driver]**.

Click

5 Select a compatible driver, click on **[Next]** to finish.
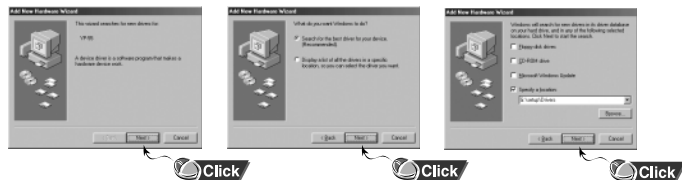
For Windows 98, refer to page 18.

Click

Continued...

In Windows 98

Click **[Next]** button in the series of windows that appear.

USB driver location
[CD ROM]\setup\Drivers

● You must reboot your computer
to complete the installation.

Using the removable storage

ENG

Downloading/Uploading files

1 Turn on the yepp and connect yepp to PC.

2 Open Windows Explorer on PC.

3 Select the file to save and drag-and-drop it into the removable disk icon.
(In numerical, alphabetical order)

Notice :
● The "WRITING/READING" message will appear during file download or upload. Disconnecting the USB cable while "WRITING/READING" is displayed may cause malfunction of the unit.
● Files within a user created folder can only be played in Music Mode.
● The order of music files is not relative to the replay order when you select a Removable Disk in Windows Explorer.

Disconnecting the USB cable

After completing the file transmission, you must disconnect the cable in the following way:

1 Double-click on the green arrow in the taskbar on the bottom right of the window. Disconnect the USB cable.

Safely Remove Hardware

Click

Stop a Hardware device

Click

*2* Select the USB device, and then press the **[Stop]** button.

Click

Note :

The green arrow is not displayed on the Task Bar in Windows 98 system. If "READY" message is shown in Display window, please disconnect the USB cable.

Continued...

ENG

Formatting

1 Select the removable disk icon and click the right mouse button to select **[Format]**.

2 Press the **[Start]** button.
- All saved files will be formatted.
- You can change the name of removable disk by selecting **[Volume label]**.

Click

Notice :
- If you format yepp in the PC without installing the provided program, it may not read the data.
- Care must be taken as formatted files can not be recovered.
- By formatting, all previously preset menus will be initialized.

Note :
- You can format by executing "YP-55 Format" located under **[Start]** ➔ **[All Programs]**

1 Insert the Installation CD into CD-ROM drive. Select **[yepp studio]**.

Click

2 Select language

Click

3 Click **[Next]** in the series of windows that appear.
● Please refer to Help for more information on how to use yepp Studio.
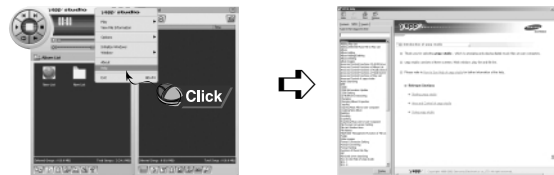

●Click

●Click

●Click

To View Help on yepp Studio

Run yepp Studio and press **F1**.
● Help will appear.
Move the arrow to the top of yepp Studio and right click on the mouse. The following selection window will appear.
● Click on Help and the Help window will appear.

●Click ⇨

Note :
● Music recognition technology and related data are provided by Gracenote and Gracenote CDDB® Music Recognition Service[SM].
● CDDB is a registered trademark of Gracenote. The Gracenote logo and logotype, the Gracenote CDDB logo and logotype, and the "Powered by Gracenote CDDB" logo are trademarks of Gracenote. Music Recognition Service and MRS are service marks of Gracenote.

Connecting yepp to Macintosh

System Requirements.

● 20MB of available hard disk space
● System Memory 64MB or greater
● CD-ROM drive
  (double speed or greater)
● USB(1.1) port supported
● Macintosh OS 9.X/10.2.6

Note :
● The driver can be recognized by Machintosh without installing an extra program. The appropriate program however must be installed to format and upgrade the firmware.
● You cannot install softwares for YP-55 in Machintosh OS 10.0 - 10.2.5.

Installing software

1 Insert the Installation CD into CD-ROM drive.
The picture shown below appears.
Select **[Samsung YP-55 Installer]**.

Click

※ When you install a program in Macintosh OS X, it may check the administrator login information.

2 After installation is complete, click on the **OK** button.

The software was successfully installed.

Quit

Click

Installing
Items remaining to be installed: 81
Installing: usbmsc.s

Stop

Installation powered by **Installer VISE**

Samsung YP-55 Installer

Easy Install

This program requires Mac OS 9 or Mac OS X version 10.2.6 to run.

yepp

Install Location

Items will be installed on the disk "Mac OS X2987"

Quit

Install

Click

yepp™ is
the Digital Audio Player

Click

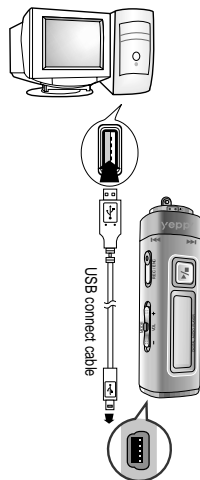**Continued...**

ENG

Connecting yepp to Macintosh with USB cable

3 Plug one end of the USB cable into the USB port on the back of the Macintosh.

4 Connect the opposite end of the USB cable to the USB cable port on the bottom of the yepp.
● The yepp will automatically turn on.
● A untitled or unlabelled portable disc is created.

USB connect cable

Downloading/Uploading files

1 Turn on the yepp and connect yepp to Macintosh.

2 A untitled or unlabelled portable disc will appear on the Macintosh screen.

3 Select the file to save and drag-and-drop it into the removable disk icon.

Notice :
● The "WRITING/READING" message will appear during file download or upload. Disconnecting the USB cable while "WRITING/READING" is displayed may cause malfunction of the unit.
● Make sure to empty the trash after deleting a file from the portable disc in order to free up space to download additional files.

Disconnecting the USB cable

After completing the file transmission, you must disconnect the cable in the following way:

1 Drag and drop the portable disc to the trash.

2 Disconnect the USB cable.
● Disconnecting without ejecting the portable disc may cause a malfunction.

Formatting

1 Click on Application Program and select **[Samsung YP-55 Formatter]**.

2 Press the **[Start]** button.
● All saved files will be formatted.
● You can change the name of removable disk by selecting **[Volume label]**.


Click

Click

Notice :
● If you format yepp in the Macintosh without installing the provided program, it may not read the data.
● Care must be taken as formatted files can not be recovered.
● By formatting, all previously preset menus will be initialized.

ENG

First, insert the battery and connect the earphones to the player.

Playing Music
(Power On)

When you press the ▶/■ button, the yepp logo appears and a music/voice file is played.

yepp' ™

⬇

**FREE MEMORY
114.37 MB**

⬇

NOR	0 0 : 0 1 : 3 0 ♪ 001

Get Original, Black Eyed

Stopping Music
(Power Off)

When you press the ▶/■ button while playing, the music stops. If no buttons are pressed within 10 seconds (changes depending on settings), the yepp automatically powers off.

● You can also turn off the power by pressing and holding the ▶/■ button on the main body.

NOR	0 0 : 0 1 : 3 0 ♪ 001

Get Original, Black Eyed

⬇

GOOD BYE ~ Z ᶻ ᶻ

Note : ● WMA files can only be played at bit rates between 48Kbps and 192Kbps.
[supplied by Windows Media Player (Ver 8.0)] WMA files less than 48Kbps may not be played.
● Power off time can be set in the MENU mode.

Adjusting the Volume

Move the ⊙ button on the side of the yepp player to adjust the volume while playing.

Note :
● Volume ranges from 00 to 30.
● Press to adjust the volume by one level.
Press and hold to increase or decrease the volume in greater increments.

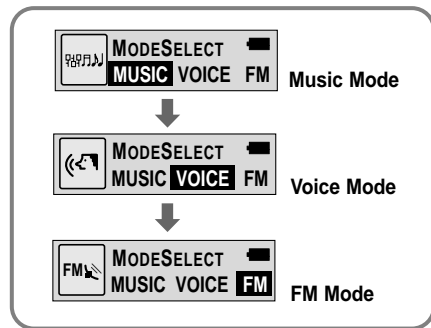| NOR	0 0 : 0 1 : 3 0 ♪ 001
NOR	⊲)) ▮▮▮▮▮▮▮▮ 20

HOLD Function

Under Hold mode, buttons will not work.

Slide the switch on the player in the direction of the arrow.

❈ When a button is pressed, " 🔒HOLD!" message will appear on the display.

NOR	0 0 : 0 1 : 3 0 ♪ 001
NOR	⊲)) ▮▮▮▮▮▮▮▮ 20

Changing Modes

1 Press the ⊟ button briefly while the player is stopped.

2 Move to the mode you want by using the ⊟ button, and then press the ⊟ button.

MODE SELECT
MUSIC VOICE FM   **Music Mode**

↓

MODE SELECT
MUSIC **VOICE** FM   **Voice Mode**

↓

MODE SELECT
MUSIC VOICE **FM**   **FM Mode**

Note : ● You will exit from the Mode Switching function if no action is taken for 15 seconds or if another button is pressed during mode switching.
● The Voice Mode settings will not be saved if the mode is switched to the Music or FM modes or if the power is turned OFF.

34

Recording Voice

To Record Voice

1 Slide the ⊟ switch to the ENC position to begin Voice Recording.

2 To stop the recording, move the ⊟ switch in the opposite direction and a new voice file will be created.

00:00:02 001
V002. WAV
➡
! **00:00:30**
V002. WAV
➡
NOR **00:00:00** V 001
V001. WAV

Note :
● Recording is done in the order of V001,V002.....
● If the Memory is full, the Voice Recording is stopped automatically.
● The Voice Recording is also enabled in Music Mode.
● The backlight will not illuminate during a Voice Recording.
● The number of saved voice files and hours available for recording will be displayed when Voice Mode is selected while the player is stopped.
● To Record Voice, be sure nothing is connected to the ENC jack.
● Voice Recording does not work in FM Mode or when the Line cable is connected.

35

1 Connect the Audio Output port on the external audio source (or the Line Out port) to the ENC port on the device with the Line cable.

2 Slide the switch to the ENC position begin MP3 encoding.

3 Slide the switch to the REC position while recording to stop the encoding, and a new encoding file will be created.

● Recording will take place in the order of L001, L002, L003.... When the recording is finished, the files will be saved as MP3 files.

Note :
● Bit Rates can be set within the range of 32Kbps~128Kbps.
● To pause during Encoding, press the ▶/ ■ button.
  Press the button once again to recommence recording.
● Volume can be adjusted from level 0 to 10 while monitoring the Encoding.

Notice :
● Do not disconnect the Line cable during Encoding.
● If the battery is not charged enough, encoding will not be done.
● Adjust the volume of the external audio source to a suitable level and encode it.
  If the volume level is extremely high, the sound quality may not be good.
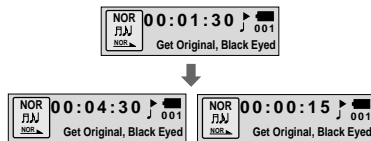
Searching for Music/Voice Files

Note :

● VBR(Variable Bit Rate) file: MP3 file whose compression rate changes when played.

● With VBR files, Turning the lever to the ▼ direction within 5 seconds from the start of the track may not result in the previous track playing.

● With VBR files, the actual running time may differ from that of the player display.

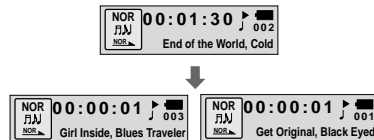● This player may not play back MPEG1 LAYER1 files.

Searching for Specific Parts in PLAY Mode

● To find a certain track, turn the ▼/▲ lever to the up or down during play.

● Release the lever and the lever will return to its original position. Playing will recommence in the normal way.
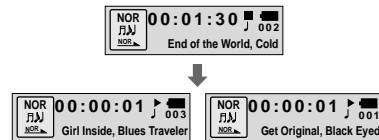
NOR ♫♫ NOR	00:01:30 ▶ 001
	Get Original, Black Eyed

↓

NOR ♫♫ NOR	00:04:30 ♪ 001	NOR ♫♫ NOR	00:00:15 ▶ 001
	Get Original, Black Eyed		Get Original, Black Eyed

Searching for Music Files in PLAY Mode.

● The next track will play if you turn the lever to the ▲ direction during play.

● To move to and play the previous track, turn the lever to the ▼ direction within 5 seconds of the beginning of play. To move to and play the current track from the beginning, turn the lever to the ▼ direction 5 seconds after the beginning of play.

NOR ♫♫ NOR	00:01:30 ▶ 002
	End of the World, Cold

↓

NOR ♫♫ NOR	00:00:01 ♪ 003	NOR ♫♫ NOR	00:00:01 ♪ 001
	Girl Inside, Blues Traveler		Get Original, Black Eyed

Searching for Music Files in STOP Mode.

Turn the lever to the up or down while the player is stopped. It moves to the ▼/▲ track and plays it.

NOR ♫♫ NOR	00:01:30 ♪ 002
	End of the World, Cold

↓

NOR ♫♫ NOR	00:00:01 ♪ 003	NOR ♫♫ NOR	00:00:01 ♪ 001
	Girl Inside, Blues Traveler		Get Original, Black Eyed

Listening to FM Radio

While the player is stopped, select FM Mode by using the [MODE/VOL] button.

Manual Search for a Frequency

Turn the ⚡/⚡ lever briefly to find the frequency you want.

```
FM  FREE  CH    ⚡
MO       99.10 MHz
```

Automatic Search for a Frequency

Turn and hold the ⚡/⚡ lever to automatically find and tune in to a transmitted frequency.

```
FM    SEARCHING   ⚡
AUTO     99.10 MHz
```

Manual Storage of a Frequency

Upon finding a frequency you want, press the ▶/■ button to store the frequency.

```
FM    CH 02      ⚡
MO       99.10 MHz
```

Note :
● To exit from FM Mode, press the [MODE] button.
● Mono (MO) or Stereo (ST) is automatically selected.

Automatic Storage of a Frequency

● Press and hold the WOW button while in FM Mode.
● Frequencies within the range of 87.50MHz to 108.00MHz are automatically selected and stored.
● Frequencies are automatically stored, starting from 1.

```
FM    AUTO PRESET⚡
SET      89.10 MHz     [1]
```

Number of Channels to be Stored

Searching Stored Frequencies

● Press the **WOW** button briefly while in FM Mode.
● The stored frequencies are successively searched.

```
FM  CH 01      ⚡         FM  CH 02      ⚡         FM  CH 03       ⚡
MO    89.10 MHz    →    MO    99.10 MHz    →    MO    100.70 MHz
```

MUTE Function

● Press and hold the [MODE/VOL] button while in FM Mode.
● As soon as 'MUTE' appears on the display no sound will be heard.
● To cancel the MUTE function, adjust the volume with [MODE/VOL] Switch.

```
FM  FREE  CH   MUTE ⚡
MO       99.10 MHz

         ↓

FM  FREE  CH    ⚡
MO       99.10 MHz
```

Note :
● You can store up to 20 frequencies.
● You can replace an existing frequency with a new one but you cannot delete a stored frequency.

FM Encoding

FM Encoding to MP3

1 Slide the switch to the ENC position during FM reception.

● Encoding of the currently transmitted FM broadcast begins.

2 Slide the switch to REC.

● A file is created and the encoding stops.
● Files are saved in order of F001, F002, F003… and stop automatically when the memory is full.

```
00:01:00     ▬
F001. MP3    001
```

```
00:01:00
F001. MP3
```

Loop Repeating

Loop Function

Starting Point

While playing music files, press the button briefly at the beginning of the loop you want to set.

A appears in the display.

```
NOR   00:01:30 A ♪ ▬
♫♪♪              001
NOR   Get Original, Black Eyed
```

Ending Point

Press the button briefly again to set the end of the loop.

A↔B appears in the display.
The loop is played repeatedly.

```
NOR   00:02:30 A↔B ▬
♫♪♪             ♪ 001
NOR   Get Original, Black Eyed
```

Note :
● Press the button briefly to cancel the loop.
● Loop Repeat is automatically released if you Speed Search with ⬇/⬆ button.

Setting up SRS (Sound Retrieval System)

1 Press the **WOW** button while in Music Mode.

2 Press the **WOW** button to move, and then press and hold the **SRS** button to select the mode you want.
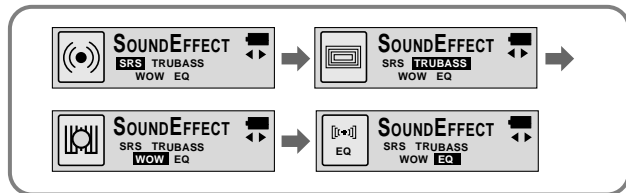
● **SRS** : You will hear 3D Stereo sound.
● **TRUBASS**: This is a bass boost feature that adds fullness to the sound.
● **WOW** : This feature allows you to enjoy the SRS and Trubass features simultaneously.
● **EQ** : Plays at the last EQ setting you made.

Note :

● **SRS(●)** is a trademark of SRS Labs, Inc.
   WOW technology is incorporated under license from SRS labs, Inc..
● Please adjust the volume to a suitable level, as the volume may increase in the SRS setting.
● This unit supports sampling frequencies of 32KHz, 44.1KHz or 48KHz.
● You can set SRS functions only in Music Mode.

Setting up MENU

To switch to Menu Mode, press and hold the [MODE] button while in Music/Voice Mode.

Press the [MODE] button briefly to select the menu you want.

To exit from Menu Mode, press and hold the [MODE] button once again.
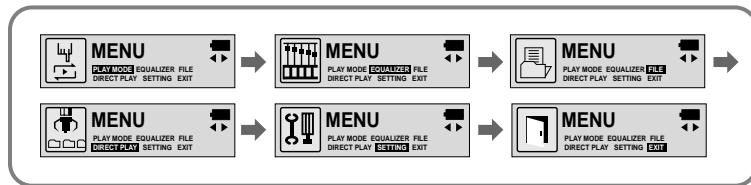
● **PLAY MODE** : To select track repeating mode.
● **EQUALIZER** : To use equalizer function.
● **FILE** : To delete or format music files.
● **DIRECT PLAY** : It plays files encoded in Music, FM or Line.
● **SETTING** : To change the basic setup options of the display.
● **EXIT** : To exit **MENU.**

Note :

● In MENU mode, no input for 15 seconds will cancel the MENU mode.
● Menu mode will be released if any button other than the MODE button is pressed.

Repeating Tracks

Track Repeating Function

1 In **MENU**, select **PLAY MODE**. (refer to "Setting up MENU")

2 In **PLAY MODE**, use the button to move to the mode you want and press the button to select.

	PLAY MODE			PLAY MODE			PLAY MODE	
INT	INTRO NORMAL REPEAT ONE REPEAT ALL SHUFFLE EXIT		NOR	INTRO NORMAL REPEAT ONE REPEAT ALL SHUFFLE EXIT		ONE	INTRO NORMAL REPEAT ONE REPEAT ALL SHUFFLE EXIT	
ALL	INTRO NORMAL REPEAT ONE REPEAT ALL SHUFFLE EXIT			INTRO NORMAL REPEAT ONE REPEAT ALL SHUFFLE EXIT			INTRO NORMAL REPEAT ONE REPEAT ALL SHUFFLE EXIT	

● **INTRO**: To play the first 10 seconds of each track.
● **NORMAL**: To play all the tracks in order one time.
● **REPEAT ONE**: To repeat one track.
● **REPEAT ALL**: To repeat all tracks.
● **SHUFFLE**: To play tracks at random.
● **EXIT**: To move to the upper menu.

46

Setting up EQ

EQ Function

1 In **MENU**, select **EQUALIZER**. (refer to "Setting up MENU")

2 In **EQ**, use the button to move to the setting you want (out of the 4 settings) and press the button to select.
● Select the DBB Mode if you want to fine-tune the sound.

3 If you want to manually adjust the equalizer, select **User** and **Bass/Treble**.
● The adjustment range of Bass/Treble is 0 to 10.

	EQUALIZER			EQUALIZER			EQUALIZER	
J	NORMAL CLASS JAZZ ROCK DBB USER EXIT		CLASS	NORMAL CLASS JAZZ ROCK DBB USER EXIT		JAZZ	NORMAL CLASS JAZZ ROCK DBB USER EXIT	
ROCK	EQUALIZER NORMAL CLASS JAZZ ROCK DBB USER EXIT		NOR	EQUALIZER NORMAL CLASS JAZZ ROCK DBB USER EXIT			EQUALIZER NORMAL CLASS JAZZ ROCK DBB USER EXIT	
	USER BASS TREBLE EXIT			EQUALIZER NORMAL CLASS JAZZ ROCK DBB USER EXIT				

Note :
● DBB is for Dynamic Bass Booster, which enhances bass response.

47

Managing Files

Deleting

1 In **MENU**, select **FILE.** (refer to "Setting up MENU")

2 In **FILE**, select **DELETE** and the mode (Music or Voice)
the target file is in.

3 Move to the file you want to delete and then press the [MODE VOL] button.
Select **CONFIRM** and then select **CANCEL** to exit from the setup.

FILE	DELETE FORMAT EXIT	➡	DELETE	MUSIC VOICE FM ENC LINE ENC EXIT	➡	DELETE	001-Get Original, Black Ey	➡

CONFIRM CANCEL	Get Original, Black Eyed	➡	CONFIRM CANCEL	COMPLETED
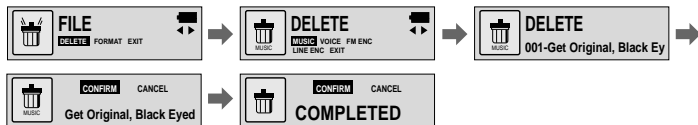
Formatting

1 In **MENU**, select **FILE.** (refer to "Setting up MENU")

2 In **File**, select **FORMAT.**

FORMAT	DELETE FORMAT EXIT	➡	FORMAT	CONFIRM CANCEL

Note :
● All files will be deleted when formatting the built-in memory.
● It is recommended that formatting be carried out on a PC that has the provided
  program installed as formatting in the Menu may take a long time.

Setting up DIRECT PLAY

DIRECT PLAY Function

● Set the player to this function for playing MP3 and FM encoded songs.

1 In **MENU**, select **DIRECT PLAY**. (refer to "Setting up MENU")

2 In **DIRECT PLAY**, move to the mode you want by pressing the button, and then press the button to select.

| DIRECT PLAY	DIRECT PLAY	DIRECT PLAY
MUSIC FM ENC LINE ENC EXIT	MUSIC **FM ENC** LINE ENC EXIT	MUSIC FM ENC **LINE ENC** EXIT

DIRECT PLAY
MUSIC FM ENC LINE ENC **EXIT**

● **MUSIC**: To play music files that are downloaded in the music folder
● **FM ENC**: To play encoded files in the FM ENC folder
● **LINE ENC**: To play encoded files in the LINE ENC folder
● **EXIT**: To move to the previous menu

Customizing Options (Display)

Setting Function

1 In **MENU**, select **SETTING**. (refer to "Setting up MENU")

2 In **SETTING,** use the button to move to the function you want to change and select the function by using the button.

SETTING	SETTING	SETTING
DISPLAY BACK LIGHT BEEP CONTRAST SCROLL SPEED	DISPLAY **BACK LIGHT** BEEP CONTRAST SCROLL SPEED	DISPLAY BACK LIGHT **BEEP** CONTRAST SCROLL SPEED
SETTING	SETTING	SETTING
DISPLAY BACK LIGHT BEEP **CONTRAST** SCROLL SPEED	DISPLAY BACK LIGHT BEEP CONTRAST **SCROLL SPEED**	**POWER OFF TIME** DEFAULT VOL WOW LEVEL ENCODE EXIT
SETTING	SETTING	SETTING
POWER OFF TIME **DEFAULT VOL** WOW LEVEL ENCODE EXIT	POWER OFF TIME DEFAULT VOL **WOW LEVEL** ENCODE EXIT	POWER OFF TIME DEFAULT VOL WOW LEVEL **ENCODE** EXIT

SETTING
POWER OFF TIME DEFAULT VOL WOW LEVEL ENCODE **EXIT**

DISPLAY

● **PLAY TIME**: displays current play time
● **REMAIN TIME**: displays remaining play time
● **USED SIZE**: displays using memory
● **FREE SIZE**: displays remaining memory

```
┌─────────────────────────────┐
│ 🖥  DISPLAY            ▤    │
│     PLAY TIME  REMAIN TIME  ◄► │
│     USED SIZE  FREE SIZE  EXIT │
└─────────────────────────────┘
```

BACK LIGHT

● Use the ⊙ button to set the
  Backlight "ON" time.
● The setting range of Backlight-On Time is
  0 to 10 seconds.
�✳ The backlight does not illuminate when the
  residual battery level is insufficient.

```
┌─────────────────────────────┐
│ 🔦  BACK LIGHT        ▤    │
│    ▮▮▮▮▮▮▮▮▮        ◄►  05 │
└─────────────────────────────┘
```

BEEP

● Use the ⊙ button to set the
  BEEP mode.
● **BEEP ON**: A beep sounds each time a
             button is pressed.
● **BEEP OFF**: No beep sounds when a
              button is pressed.

Note :
● No beep sounds while playing or recording of a
  music/voice file even when set to 'BEEP ON'.

```
┌─────────────────────────────┐
│ 🔇  BEEP              ▤    │
│         ON      OFF      ◄►  │
└─────────────────────────────┘
```

CONTRAST

● Use the ⊙ button to set the Contrast.
● The setting range of the contrast, which
  adjusts the brightness of the screen, is
  0 to 10.

```
┌─────────────────────────────┐
│ ◐  CONTRAST          ▤    │
│    ▮▮▮▮▮▮▮▮        ◄►  06 │
└─────────────────────────────┘
```

SCROLL SPEED

- Use the [MODE/VOL] button to set the Scroll Speed.

- The setting range of the scroll speed, which adjusts the speed of the track title flow, is 0 to 10.

SCROLL SPEED
SCROLL SPEED
06

POWER OFF TIME

- Use the [MODE/VOL] button to set the Power Off Time.

- The setting is 5 different levels ranging from 0 to 25 seconds. The power will turn off after the set time if no button is pressed when the playback ends.

POW OFF TIME
5SEC

Note :
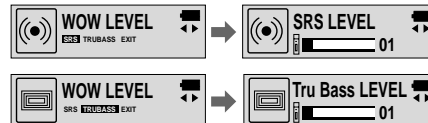- When '0 second' is set, the power will not turn off but will remain in Standby Mode.

DEFAULT VOLUME

- Use the [MODE/VOL] button to set the Default Volume.
- The default volume setting range of the unit is 0 to 25. If the Volume is above 25(26-30) when you turn the device off, it will default to 25 when the device is turned back on.
- If the Volume is set to 25 or lower when you turn the device off, it will return to that setting when it is turned back on.

DEFAULT DEFAULT VOL
17

WOW LEVEL

- The levels of SRS and TRUBASS can be adjusted.
- Select the mode you want by using the [MODE/VOL] button.
- The level for SRS and TRUBASS can each be set within the range of 0 to 10.

WOW LEVEL
SRS TRUBASS EXIT
→
SRS LEVEL
01

WOW LEVEL
SRS TRUBASS EXIT
→
Tru Bass LEVEL
01

ENCODE

AUTO SYNC

- Use the ⬚ button to set the Encode AUTO SYNC.
- **ON**: Automatically creates a file for each track.
- **OFF**: All songs recorded in ENC mode are saved in a single file.

```
AUTO SYNC
ON  OFF
```

Note :

- What is Auto Sync?
  Auto Sync senses the input sound during MP3 encoding.
  If there is no sound, encoding stops automatically. Otherwise,
  encoding keeps going. You can save MP3 files separately.
  Example) If you encode a CD including 10 music files with MP3,
  10 MP3 files are created automatically when set the Auto Sync to ON.

- Auto Sync function can support from 64Kbps to 128Kbps.

BIT RATE

- Use the ⬚ button to set the Encode BIT RATE.
- When encoding music into an MP3 file, you can select one of the following bit rates: 32Kbps, 48Kbps, 64Kbps, 96Kbps and 128Kbps.

```
BIT RATE
        32Kbps
   ↓
BIT RATE
        48Kbps
   ↓
BIT RATE
        64Kbps
   ↓
BIT RATE
        96Kbps
   ↓
BIT RATE
        128Kbps
```
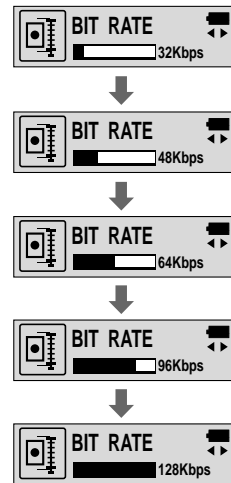
Description of Buttons (yepp player)

BUTTON	STATUS	PRESSING LENGTH	RESPONSE
▶/■	Power Off		Power On, and play
	Play		Pause(When no button is pressed for 10 seconds, yepp powers off automatically) Press and hold the 2 seconds Power Off.
	MENU Mode		Cancel
	Intro Play		Cancels Intro, returns to Play mode
▲▲	Play	Less than 1 second	Play the next track
	Play	Longer than 1 Second	Fast forward search in PLAY mode
	Stop/Pause		Play the next track
	FM Mode		Frequency Search
	MENU Mode		Cancel MENU
▼▼	Play	Short	Within 5 seconds from the start: Play the previous track After 5 seconds from the start: Play the beginning of the current track.

	STATUS	PRESSING LENGTH	RESPONSE
▼▼	Play	Longer than 1 Second	Fast reverse search in PLAY mode
	Stop/Pause		Play the previous track
	FM Mode		Frequency Search
MODE VOL Volume	Play or Stop Mode		Volume increase/decrease
	MENU Mode		Move MENU
MODE VOL Mode	Play	Short	Set the starting point for loop function
	During Loop Setting	Short	Loop mode
	Loop Mode	Short	Cancel loop mode
	Stop	Short	Changing modes (music ↔ voice ↔ FM)
	Play or Stop Mode	Longer than 2 Seconds	Enter MENU
	MENU Mode		Selection/Exiting MENU
REC/ENC	Play or Stop Mode		Voice recording
	VoiceRecording/Encoding		Voice Recording/Encoding Stop
	Line in Connect		MP3 Encoding
	FM Mode		FM Encoding

MENU Table

MENU

● Select with the [MODE/VOL] button and move.

PLAY MODE
- INTRO
- NORMAL
- REPEAT ONE
- REPEAT ALL
- SHUFFLE
- EXIT

EQUALIZER
- NORMAL
- CLASS
- JAZZ
- ROCK
- DBB
- USER
  - BASS
  - TREBLE
  - EXIT
- EXIT

FILE
- DELETE
  - MUSIC
  - VOICE
  - FM ENC
  - LINE ENC
  - EXIT
- FORMAT
  - CONFIRM
  - CANCEL
- EXIT

DIRECT PLAY
- MUSIC
- FM ENC
- LINE ENC
- EXIT

SETTING
- DISPLAY
  - PLAY TIME
  - REMAIN TIME
  - USED SIZE
  - FREE SIZE
  - EXIT
- BACK LIGHT
- BEEP
- CONTRAST
- SCROLL SPEED
- POWER OFF TIME
- DEFAULT VOL
- WOW LEVEL
  - SRS
  - TRU BASS
  - EXIT
- ENCODE
  - AUTO SYNC
  - BIT RATE
  - EXIT
- EXIT

EXIT

Troubleshooting

yepp does not work and the LCD displays nothing.
● Check the battery capacity
● Check to see if the battery is inserted to the right poles (+ , −)

In PLAY mode, music is not played after pressing the ▶/ ■ button
● Check to see if MP3 or WMA files are saved in the built-in memory.
● Check to see if the HOLD switch is locked.
● Check if the REC button is on.
● Check if the memory is full.

Files cannot be downloaded.
● Check to see if the driver is installed correctly in the computer.
● Check the connection between yepp and computer.
● Check and/or replace the battery, turn on the yepp's power.
● The Windows98 operating system limits the number of files you can save.
  Please save your music files by creating a subfolder.

Backlight does not work.
● Check the backlight setup.
● When the battery power is low, the backlight will go out.

The buttons do not work.
● Check setting of Hold switch.
● When the message "Please Reformat" is displayed, please format your
  YP-55 by installing the software using Windows Explorer.

yepp keeps being turned off.
● In Stop mode, the power is automatically turned off after ten seconds
  (changes depending on settings).
● Check to see if there are files saved in it.

Something's wrong with play time displayed during Play mode.
● "VBR SONG" message is displayed while VBR (Variable Bit Rate) file is playing.

LCD window is dark
● Check Contrast

Specifications

Model	YP-55
Built-in Memory capacity	128MB(YP-55 H)/192MB(YP-55 i)/256MB(YP-55 V)
Voltage	1.5V✕1 (AAA/LR03 size alkaline battery)
Playing time	lasts up to 15hours (Alkaline battery, MP3 128Kbps, Vol level 20)
Dimensions/Weight	26 ✕ 81 ✕ 26 mm/45g (without battery)
Case	Plastic/Aluminum
Noise Ratio	80dB with 20kHz LPF (1KHz 0dB)
Earphones Jack Output Power	5mW(Max 10mW)/CH (16 Ω)
Output Frequency Range	20Hz~20kHz
Operating Temperature Range	5 ~ +35˚C (41 ~ 95F)
FM Frequency	87.50 ~ 108.00 MHz
FM Signal to Noise Ratio	45 dB
FM T.H.D	1%
FM Useable Sensitiivity	10 dB
File Support	MPEG1/2/2.5 Layer3 (8Kbps ~ 320Kbps, 8KHz ~ 48 KHz) WMA (48Kbps ~ 192Kbps, 8KHz ~ 48KHz)

Memo